


Electronic Ballasts for T8/TC-DD Fluorescent Lamps with Universal Voltage 110 - 260V

PRIME
LIGHT

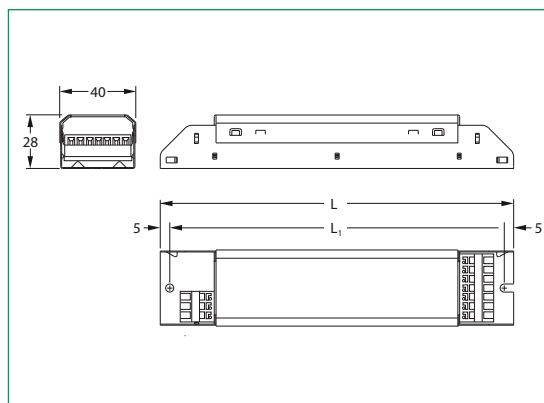

BE
110 - 260V
50/60Hz
14W - 58W

- Class 1 ballast for built-in use
- Can be used for lighting equipment in protection Class I and II
- Push in connector with retaining springs. Connector cross section 0.5 - 1.5 mm²
- IDC connections available upon request
- Ignition with pre-heating in cathodes for longer lamp life without flashes or flickering
- Constant total power and stabilized luminous flux
- High frequency operation. High energy efficiency
- Corrected stroboscopic effect
- Overvoltage protection 350V AC 2 hours

Ballast Reference	Power W	Lamp	Cap	ta °C	tc °C	EEL Index	λ	Weight kg	Dimensions mm			
									W	H	L	L ₁
BE 118-4-UN	1x14	T8 370 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
	1x18	T8 600 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
BE 130-4-UN	1x25	T8 700 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
	1x25	T8 750 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
	1x28	TC-DD	GR10q	-20 +55	70	A2	0.98	0.225	40	28	230	220
	1x30	T8 900 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
BE 136-4-UN	1x36	T8 1200 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
BE 158-4-UN	1x58	T8 1500 mm	G13	-20 +55	70	A2	0.98	0.225	40	28	230	220
BE 218-4-UN	1/2x15	T8 450 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
	1/2x18	T8 600 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
BE 230-4-UN	1/2x15	T8 550 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
	1/2x25	T8 750 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
	1/2x28	TC-DD	GR10q	-20 +55	70	A2	0.98	0.235	40	28	230	220
	1/2x30	T8 900 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
BE 232-4-UN	1/2x32	T8 1200 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
BE 236-4-UN	1/2x36	T8 1200 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220
	1/2x18	T8 600 mm	G13	-20 +55	70	A2	0.98	0.235	40	28	230	220

Approvals

EN-61347-2-3 EN-61000-3-2 EN-61547
EN-60929 EN-55015



*Approval pending