


FFD 20/01/070-130

Sealing for flat cable

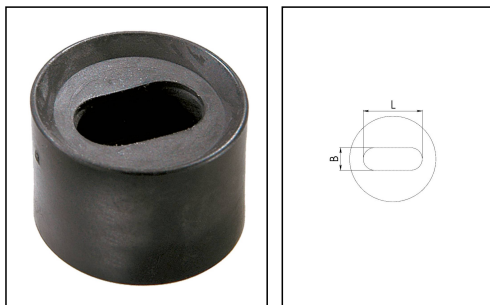

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

SPRINT

hategen

RoHS

Material	Thermoplastic elastomer
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP66
Colour	Black
Thickness flat cable B min	6 mm
Thickness flat cable B max	7 mm
Flat cable width L min	12,5 mm
Flat cable width L max	13 mm
Quantity of cable	1
Using for cable gland	SPRINT 20
Product Color	RAL 9005
Order no. RAL 9005	10101192
Type	FFD 20/01/070-130
Packing unit	25
ETIM-Classification	EC000441

29.04.2021


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

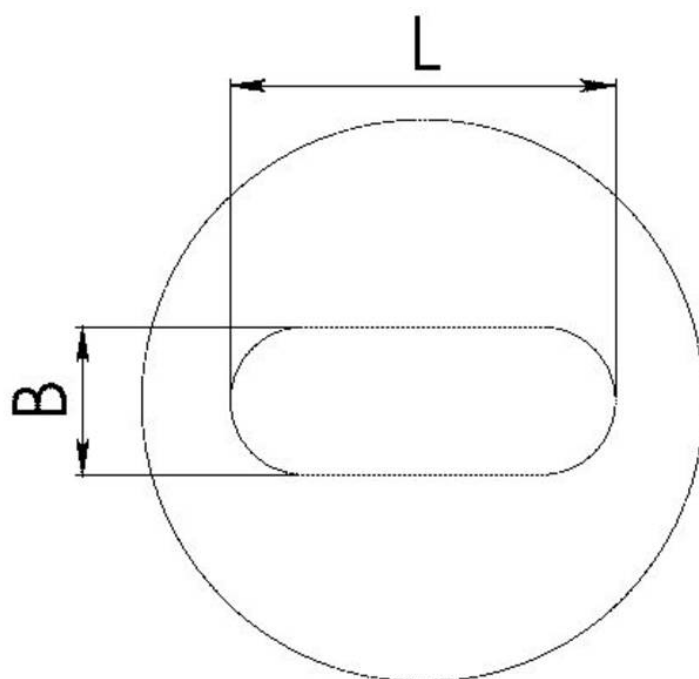

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice