




Technology for Light

Linear Flat Module 565 mm
GR6d-1 - 2100 lm - 6500 K - DA
75°
32.130.3036.00



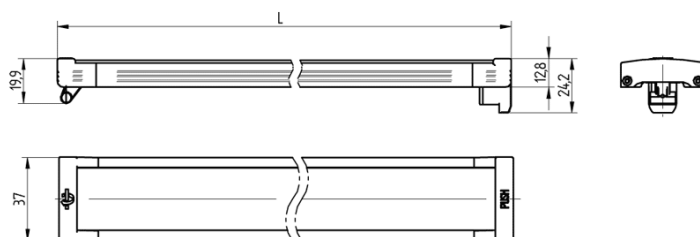

Linear Flat Module 565 mm GR6d-1 - 2100 lm - 6500 K - DA 75° 32.130.3036.00

Technology for Light

DESCRIPTION

Exchangeable LED-lamp - According to Zhaga Book 14
No additional tools required
Quick and easy installation even in very narrow luminaires (slot light channels)
Audible and tactile feedback during mounting process „Click-Fit“
Straight and pure design, genuine high grade materials
Tight colour tolerance: McAdams 3.5 SDCM
Life span L80B10 > 50.000 h
Ambient temperature: -30 °C bis + 45 °C
Module efficiency and Luminous flux measured at Tc = 25 °C
TC: max. 65° C
Risk group: 0
Protection class: IP20
Guarantee*: 5 years
RoHs

Product name:	Linear Flat Module 565 mm GR6d-1 - 2100 lm - 6500 K - DA 75°
Light Distribution:	Double asymmetrical 75°
Color temperature:	6500 K
CRI:	>80
Length:	565 mm
Width:	37 mm
Height (build in):	15 mm
Flux at Tc 50° C:	2100 lm
Operational voltage Uf at Tc 50° C:	36.5 V
Power consumption (W) at Tc 50° C:	12.8 W
Operational current (If):	350 mA
Module efficiency at Tc 50° C:	164 lm/W
Module output up to:	3700 lm/m
Energie efficiency class:	A++
Socket:	GR6d-1
Pkg.:	20