




Technology for Light

**Linear Flat Module 1166 mm**  
**GR6d-3 - 3950 lm - 4000 K - DA**  
**75°**  
**32.130.3037.00**



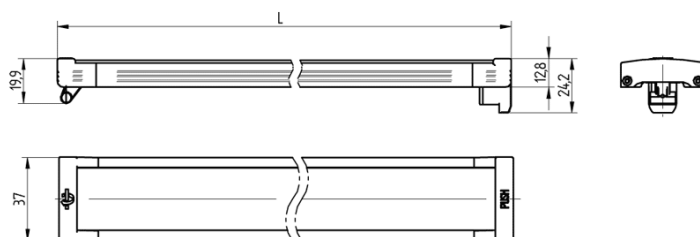

Technology for Light

# Linear Flat Module 1166 mm GR6d-3 - 3950 lm - 4000 K - DA 75° 32.130.3037.00

## DESCRIPTION

Exchangeable LED-lamp - According to Zhaga Book 14  
No additional tools required  
Quick and easy installation even in very narrow luminaires (slot light channels)  
Audible and tactile feedback during mounting process „Click-Fit“  
Straight and pure design, genuine high grade materials  
Tight colour tolerance: McAdams 3.5 SDCM  
Life span L80B10 > 50.000 h  
Ambient temperature: -30 °C bis + 45 °C  
Module efficiency and Luminous flux measured at Tc = 25 °C  
TC: max. 65° C  
Risk group: 0  
Protection class: IP20  
Guarantee\*: 5 years  
RoHs

ZZ_ERP_ROHS_REACH:	This product contains the following REACH SVHC substances: Lead in electrical / electronic components on the PCB board For more information, please refer to: <a href="https://www.bjb.com/en/Information-RoHS/REACH">https://www.bjb.com/en/Information-RoHS/REACH</a>
Product name:	Linear Flat Module 1166 mm GR6d-3 - 3950 lm - 4000 K - DA 75°
Light Distribution:	Double asymmetrical 75°
Color temperature:	3000 K
CRI:	>80
Length:	1166 mm
Width:	37 mm
Height (build in):	15 mm
Flux at Tc 50° C:	3950 lm
Operational voltage Uf at Tc 50° C:	36.5 V
Power consumption (W) at Tc 50° C:	25.6 W
Operational current (If):	700 mA
Module efficiency at Tc 50° C:	155 lm/W
Module output up to:	3400 lm/m
Energie efficiency class:	A++
Socket:	GR6d-3
Pkg.:	20