

Building Light Control Bluetooth Gateway



Product Sheet

The Bluetooth Gateway enables communication between the Mymesh network and the compatible commissioning App for iPad

Technical summary

The Bluetooth Gateway uses the Mymesh network protocol to communicate with the Mymesh network and uses the Bluetooth Low Energy protocol to communicate with the iPad.

Order information

BLC.2000.002
Bluetooth Gateway


Network features

- Wireless, stand-alone network that is self-organizing and self-healing
- 2.4GHz communication for reliable data transfer
- Secure by design
- Ultra-scalable to > 10,000 fixtures in one network
- Low operational cost


Features

- Comes with a rechargeable battery including micro-USB power cable
- Commissioning App for iPad available for commissioning of Mymesh devices

A smarter way to connect your building



Technical specifications

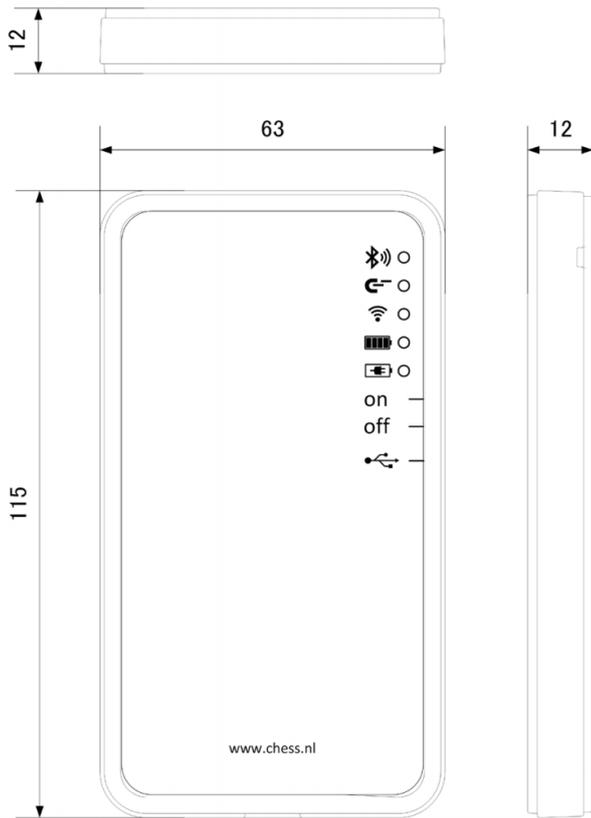

Technical Specifications

Connections

Power supply: Micro-USB - 5V DC 500mA

Power adapter

Power supply: single phase 230VAC (+/-10% 50Hz)

Certification

CE marking

Radio

2.4GHz ISM band (2.400 - 2.4835 GHz)

Housing

LxWxH: 115 x 63 x12 mm

Material: ABS (UL94HB)

Color: White