




TM.ONTEC D C1 302 M ST


TM-OD.C1STM300W

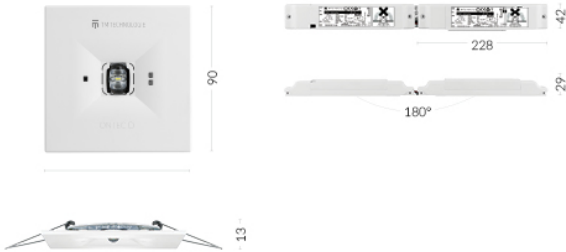

PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Temperature range	10-35 °C
Material	PC
Colour	white
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	7.0 W
Insulation class	2
Luminous flux	260 lm
Battery	LiFePO4/C 6.4V 1.5Ah



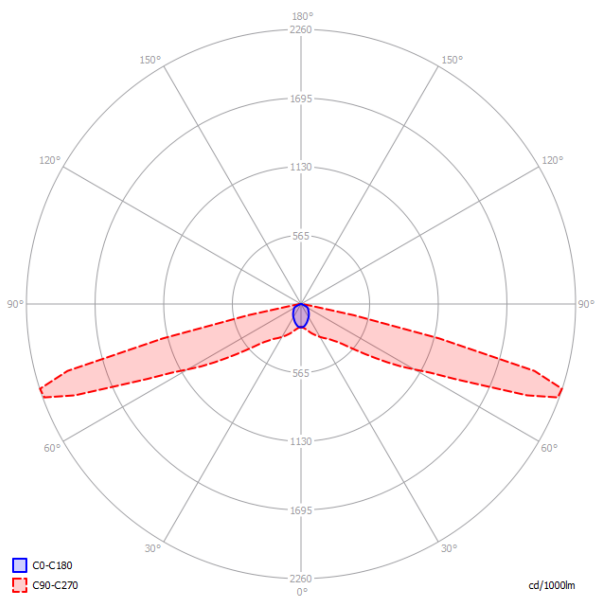

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

9,2
10,2
11,7
10,9
5,6
3,6
2,7

Distance fitting - fitting

20,2
23,0
28,0
31,0
29,0
25,0
20,5

