




TM.ONTEC D C1U 301 NM ST


TM-OD.CUSTN300W

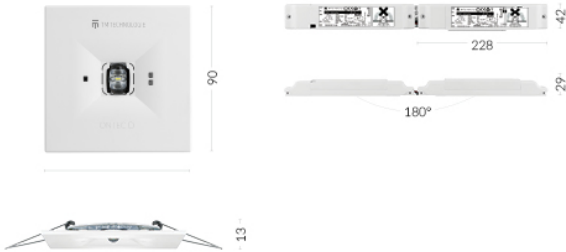

PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Temperature range	10-35 °C
Material	PC
Colour	white
Duration time	3 h
Operating mode	NM
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.8 W
Insulation class	2
Luminous flux	141 lm
Battery	Ni-Cd HT 3.6V 1.5Ah



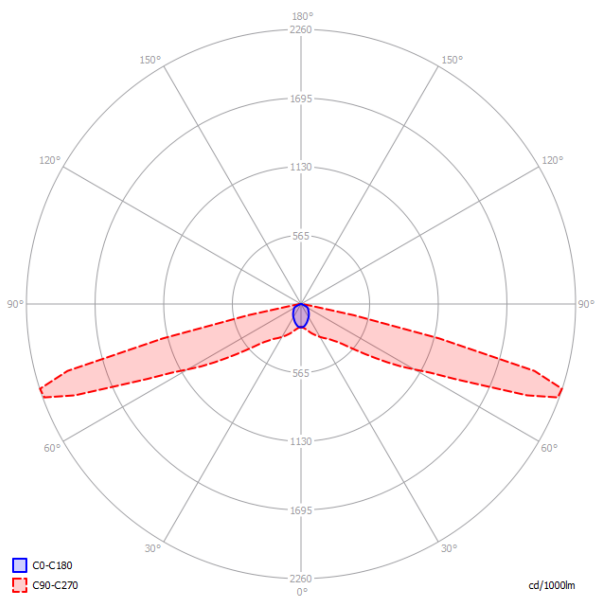

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

8,1
8,7
6,8
3,2
2,5

Distance fitting - fitting

18,4
21,0
23,6
17,5
14,0

