




# TM.ONTEC C M1 180 NM ST


TM-OC.M1STN800B

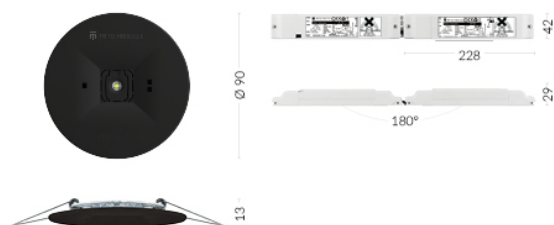

## PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Temperature range	10-35 °C
Material	PC
Colour	black
Duration time	3 h
Operating mode	NM
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Insulation class	2
Luminous flux	160 lm
Battery	LiFePO4/C 3.2V 1.5Ah



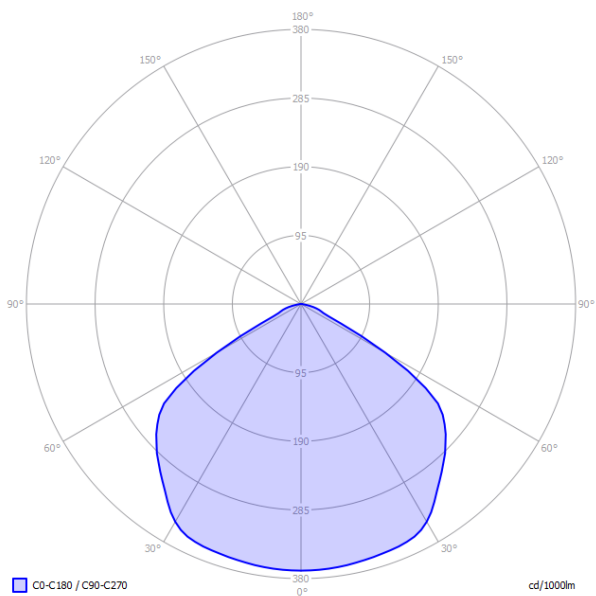

## PHOTOMETRY [m]

### Ceiling height

2,5  
3,0  
4,0  
5,0  
6,0  
7,0  
8,0  
9,0  
10,0

### Distance wall - fitting

3,2  
3,5  
3,9  
3,9  
3,7  
3,4  
3,3  
3,0  
2,8

### Distance fitting - fitting

7,0  
8,0  
9,5  
11,2  
12,2  
12,6  
12,4  
12,0  
11,2

