



TM.ONTEC C M2 302 M DALI

TM-OC.M2.DA001




PARAMETERS



Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP20
IK	IK03
Version	DALI
Power supply	210+250 V AC 50+60 Hz
Temperature range	10-35 °C
Material	PC
Colour	white
Duration time	3 h
Operating mode	M
Type	A - maintained, controllable, dimmable
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	4.4 W
Insulation class	2
Luminous flux	288 lm
Battery	LiFePO4/C 6.4V 1.5Ah



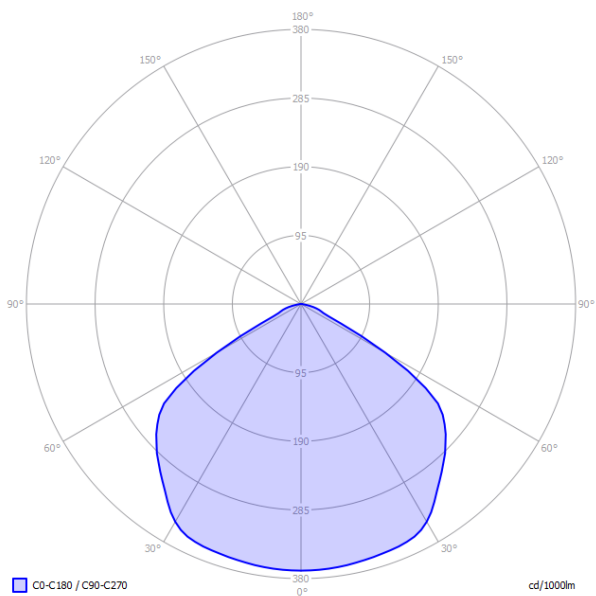

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

3,4
4,0
4,8
5,3
5,4
5,4
5,3
5,3
5,0

Distance fitting - fitting

7,8
8,8
10,9
12,2
14,0
15,2
16,0
17,0
17,5

