


# BCC/SL

220 - 240V

50/60Hz

4W - 28W

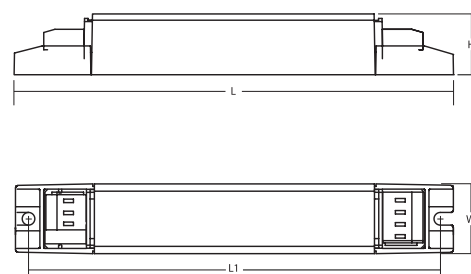

- Compact size electronic ballast for built-in use
- Suitable for connection to emergency equipment in compliance with EN-60598-2-22
- Can be used for lighting equipment in protection Class I and II
- Push in connector with retaining springs. Connector cross section 0.5 - 1.5 mm<sup>2</sup>
- Start with pre-heating for longer lamp life (cut-off function)
- Protection against lamp disconnection (re-start with pre-heating), lamp failure or end of life
- Ballast can be secured with slots for M4 screws

Ballast Reference	Power W	Lamp	Cap	ta °C	tc °C	EEL Index	λ	Weight kg	Dimensions mm			
									W	H	L	L <sub>1</sub>
<b>BCC 113 SL*</b>	6-8-11-13	T2	W4,3	-15 +55	75	A2	0.6	0.05	22	19	150	140
<b>BCC 116 SL*</b>	4-6-8-13-14	T5	G5	-15 +55	75	A2	0.6	0.05	22	19	150	140
	16	T8	G13	-15 +55	75	A2	0.6	0.05	22	19	150	140
	5-7-9-11	TC-S/E	2G7	-15 +55	75	A2	0.6	0.05	22	19	150	140
	10	TC-D/E	G24q-1	-15 +55	75	A2	0.6	0.05	22	19	150	140
	10-16	TC-DD	Gr10q	-15 +55	75	A2	0.6	0.05	22	19	150	140
<b>BCC 121 SL*</b>	14-21	T5	G5	-15 +55	80	A2	0.6	0.05	22	19	150	140
	13-18	TC-D/E	G24q-1/2	-15 +55	80	A2	0.6	0.05	22	19	150	140
	13-18	TC-T/E	GX24q-1/2	-15 +55	80	A2	0.6	0.05	22	19	150	140
<b>BCC 122 SL</b>	22	T-R5	2GX13	-15 +55	85	A2	0.6	0.05	22	19	150	140
	21-28	TC-DD	Gr10q	-15 +55	85	A2	0.6	0.05	22	19	150	140
<b>BCC 124 SL*</b>	24	T5	G5	-15 +55	85	A2	0.6	0.05	22	19	150	140
	14-15-18	T8	G13	-15 +55	85	A2	0.6	0.05	22	19	150	140
	18-24	TC-L	2G11	-15 +55	85	A2	0.6	0.05	22	19	150	140
	18-24	TC-F	2G10	-15 +55	85	A2	0.6	0.05	22	19	150	140
	22	T-R5	2GX13	-15 +55	85	A2	0.6	0.05	22	19	150	140
<b>BCC 126 SL*</b>	24	T5	G5	-15 +55	85	A2	0.6	0.05	22	19	150	140
	24	TC-L	2G11	-15 +55	85	A2	0.6	0.05	22	19	150	140
	24	TC-F	2G10	-15 +55	85	A2	0.6	0.05	22	19	150	140
	26	TC-D/E	G24q-3	-15 +55	85	A2	0.6	0.05	22	19	150	140
	26	TC-T/E	GX24q-3	-15 +55	85	A2	0.6	0.05	22	19	150	140
	22	T-R5	2GX13	-15 +55	85	A2	0.6	0.05	22	19	150	140
<b>BCC 128 SL</b>	28	T5	G5	-15 +55	85	A2	0.6	0.05	22	19	150	140

## Approvals

EN-61347-2-3  
EN-55015

EN-61547  
EN-61000-3-2


\*Approval pending