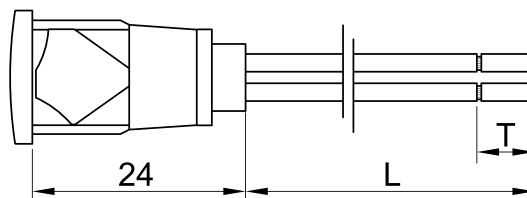
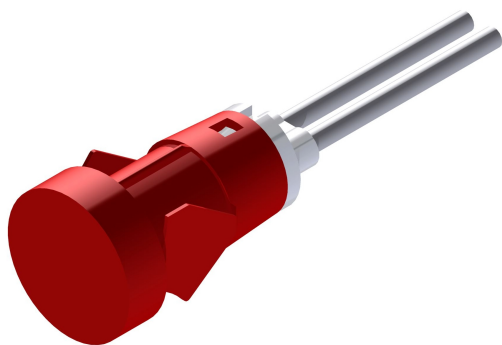




SLIM S.r.l.

Via dei Tigli, 14/16 (Z.I.)
20853 - Biassono (Monza Brianza) - Italy
commerciale@slim.it
www.slim.it

CODE: **TB/013/SFY**









Light indicator with self-locking connection

The compact shape allows a minimum internal encumbrance

Lamps	incandescent • neon/fluoro • LED
Working Voltage	2V • 6V • 12V • 24V • 48V • 110V • 250V • 400V
Working temperature	90°C Max • 120°C Max • 150°C Max
Hole diameter	13mm
Recommended thickness panel	from 0,8mm to 2mm
Method of connection to the panel	self-locking
Type of connection	PVC cable • silicone cable • silicone-glass cable
Wire ends	on request
Type of lens	SFY1 • SFY2 • SFY3 • SFY4 • SFY5 • SFY6

Lenses available

<div>SFY 1</div> <div></div>	<div>SFY 2</div> <div></div>	<div>SFY 3</div> <div></div>	<div>SFY 4</div> <div></div>	<div>SFY 5</div> <div></div>	<div>SFY 6</div> <div></div>
---	---	---	---	---	---

* Ghiera in metallo - Metal ring